

BRUSHLESS POWER TORQUE DC-TYPE AUTOMATIC TRIGGER AND PUSH START CLUTCH TYPE SERIES(High Torque-High Speed) SKD-B800 Series 【SKD-B830L, SKD-B850L, SKD-B830LF】 【SKD-B830P, SKD-B850P, SKD-B830PF】


KILEWS®




SKD-B830L/P, SKD-B850L/P, SKD-B830LF/PF

- Brushless feature is applicable in a dust-free condition. The output of torque is highly stable. It is not only a easy-operate equipment but this screwdriver can be operated for a long period.
- The screwdriver has a LED light which is able to remind the operators that the power is supplying.
- The series of SKD-B800 has two rotation rates selection: 1,000r.p.m / 2,000r.p.m. The range of th torque could be reach to 10-50kgf.cm.
- Besides, it is a toner-free and noise-free equipment and Low voltage DC40V is also applied. There are variable torque's ranges can be selected: 30kgf.cm/2000r.p.m, 30kgf.cm/1000r.p.m, and 50kgf.cm/1000r.p.m.
- The best choice when composing the vertical's internal parts and/or any large-size electric equipments, including home appliances, LED/LCD panels and etc.
- Optional accessories spring balancer hoist or pistol grip can be added for easy and safe operation.

External Dimension

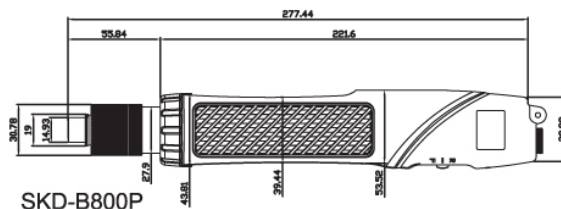


SKD-B800P

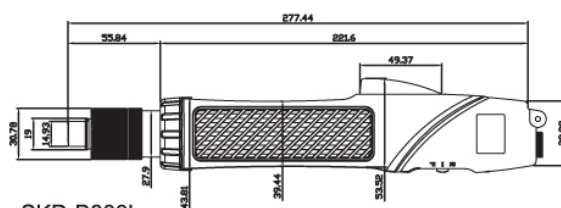


SKD-B800L

Torque Range Chart

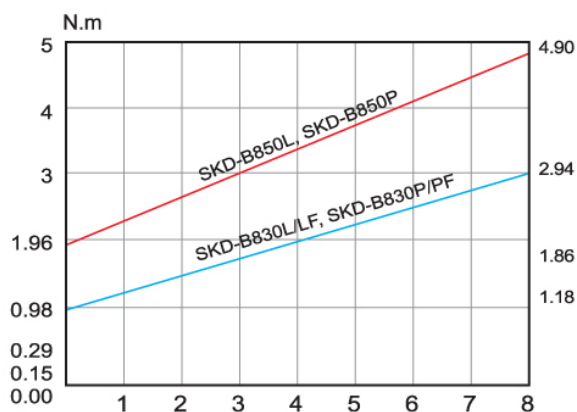

Specifications

Model		SKD-B830L	SKD-B830P	SKD-B830LF	SKD-B830PF	SKD-B850L	SKD-B850P
Input Voltage		DC40V					
Power Consumption		90W	90W	90W	90W	120W	120W
Torque	(kgf.cm)	10~30	10~30	10~30	10~30	20~50	20~50
	(Lbf.in)	8.86~26.04	8.86~26.04	8.86~26.04	8.86~26.04	17.36~43.40	17.36~43.40
	(N.m)	0.98~2.94	0.98~2.94	0.98~2.94	0.98~2.94	1.96~4.90	1.96~4.90
Repeatable Torque Accuracy(%)		±3%					
Torque Adjustment		Stepless					
Free Speed (r.p.m)	HI	1000	1000	2000	2000	1000	1000
	LO	-	-	-	-	-	-
Screw Size Dia (mm)	Machine Screw	2.6~4.0	2.6~4.0	2.6~4.0	2.6~4.0	4.0~5.0	4.0~5.0
	Tapping Screw	2.6~3.5	2.6~3.5	2.6~3.5	2.6~3.5	≤4	≤4
Weight(g)		800					
Length(mm)		278					
ESD(Anti-Static)		✓					
CE		✓					
RoHS		✓					
Bit Type		  					

Accessories

