


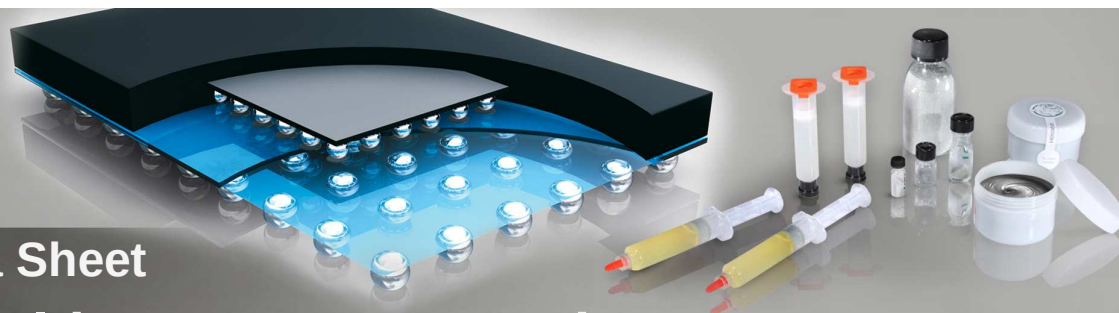

Heraeus

Technical Data Sheet

Lead Free Solder Paste F680 Series

Description	F 680 Solder Paste series is a state-of-the-art lead free no clean solder paste that promotes a wetting and minimizes soldering defects. The F680 Series exhibits excellent print-after-wait performance. It also provides a very low void level. The F 680 flux system is specifically optimized for Sn/Ag/Cu alloy soldering.																																																																												
Key Benefits	- Exceptional print to print consistency - Outstanding wetting - Min. 8 hours tack and work life							Compliant Products																																																																					
Product Code and Alloy	<table><thead><tr><th colspan="5">Code</th></tr><tr><th>Paste</th><th>Alloy</th><th>Metal Content</th><th>Viscosity</th><th>Powder Type</th></tr></thead><tbody><tr><td>F680</td><td>SA30C5</td><td>88</td><td>M</td><td>3</td></tr><tr><td>F680</td><td>SA40C5</td><td>88</td><td>M</td><td>3</td></tr><tr><td>F680</td><td>SA30C5</td><td>89</td><td>M</td><td>4</td></tr><tr><td>F680</td><td>SA3C7</td><td>88</td><td>M</td><td>3</td></tr></tbody></table>					Code					Paste	Alloy	Metal Content	Viscosity	Powder Type	F680	SA30C5	88	M	3	F680	SA40C5	88	M	3	F680	SA30C5	89	M	4	F680	SA3C7	88	M	3	<table><thead><tr><th colspan="2">Powder Properties</th><th>Melting</th></tr><tr><th>Particle Size</th><th>Alloy</th><th>Point / Range</th></tr></thead><tbody><tr><td>25 - 45 µm</td><td>Sn96,5/Ag3/Cu0,5</td><td>217°C</td></tr><tr><td>25 - 45 µm</td><td>Sn95,5/Ag4/Cu0,5</td><td>217°C</td></tr><tr><td>20 - 38 µm</td><td>Sn96,5/Ag3/Cu0,5</td><td>217°C</td></tr><tr><td>25 - 45 µm</td><td>Sn99/Ag0,3/Cu0,7</td><td>217-227°C</td></tr></tbody></table>			Powder Properties		Melting	Particle Size	Alloy	Point / Range	25 - 45 µm	Sn96,5/Ag3/Cu0,5	217°C	25 - 45 µm	Sn95,5/Ag4/Cu0,5	217°C	20 - 38 µm	Sn96,5/Ag3/Cu0,5	217°C	25 - 45 µm	Sn99/Ag0,3/Cu0,7	217-227°C	<table><thead><tr><th colspan="3">Application</th></tr><tr><th>Stencil Printing</th><th>Screen Printing</th><th>Dispensing</th></tr></thead><tbody><tr><td>☒</td><td>☐</td><td>☐</td></tr><tr><td>☒</td><td>☐</td><td>☐</td></tr><tr><td>☒</td><td>☐</td><td>☐</td></tr><tr><td>☒</td><td>☐</td><td>☐</td></tr></tbody></table>			Application			Stencil Printing	Screen Printing	Dispensing	☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐
Code																																																																													
Paste	Alloy	Metal Content	Viscosity	Powder Type																																																																									
F680	SA30C5	88	M	3																																																																									
F680	SA40C5	88	M	3																																																																									
F680	SA30C5	89	M	4																																																																									
F680	SA3C7	88	M	3																																																																									
Powder Properties		Melting																																																																											
Particle Size	Alloy	Point / Range																																																																											
25 - 45 µm	Sn96,5/Ag3/Cu0,5	217°C																																																																											
25 - 45 µm	Sn95,5/Ag4/Cu0,5	217°C																																																																											
20 - 38 µm	Sn96,5/Ag3/Cu0,5	217°C																																																																											
25 - 45 µm	Sn99/Ag0,3/Cu0,7	217-227°C																																																																											
Application																																																																													
Stencil Printing	Screen Printing	Dispensing																																																																											
☒	☐	☐																																																																											
☒	☐	☐																																																																											
☒	☐	☐																																																																											
☒	☐	☐																																																																											
Flux Activity	<table><thead><tr><th>No Clean</th></tr></thead><tbody><tr><td>☒</td></tr></tbody></table>		No Clean	☒	<table><thead><tr><th>Water Washable</th></tr></thead><tbody><tr><td>☐</td></tr></tbody></table>		Water Washable	☐	<table><thead><tr><th>ISO 9454-1:1990 [DIN EN 29454-1:1993]</th></tr></thead><tbody><tr><td>1.2.2.C</td></tr></tbody></table>		ISO 9454-1:1990 [DIN EN 29454-1:1993]	1.2.2.C	<table><thead><tr><th>J-STD-004A:2004</th></tr></thead><tbody><tr><td>RELO</td></tr></tbody></table>		J-STD-004A:2004	RELO	<table><thead><tr><th>Bellcore GR-78-Core [Issue 1:1997]</th></tr></thead><tbody><tr><td>not tested</td></tr></tbody></table>		Bellcore GR-78-Core [Issue 1:1997]	not tested	<table><thead><tr><th>Siemens Norm [SN 59650:1998]</th></tr></thead><tbody><tr><td>not tested</td></tr></tbody></table>		Siemens Norm [SN 59650:1998]	not tested																																																					
No Clean																																																																													
☒																																																																													
Water Washable																																																																													
☐																																																																													
ISO 9454-1:1990 [DIN EN 29454-1:1993]																																																																													
1.2.2.C																																																																													
J-STD-004A:2004																																																																													
RELO																																																																													
Bellcore GR-78-Core [Issue 1:1997]																																																																													
not tested																																																																													
Siemens Norm [SN 59650:1998]																																																																													
not tested																																																																													
Halogen Content	<table><thead><tr><th>Halogen Free</th></tr></thead><tbody><tr><td>☐</td></tr></tbody></table> Halogen Free-Tolerances from IEC 61249-2-21: Cl or Br <900ppm, total <1500ppm; measured according to BS EN 14582							Halogen Free	☐	<table><thead><tr><th>Halogen Zero - No Halogen added in the Flux:</th></tr></thead><tbody><tr><td>☐</td></tr></tbody></table> Halogen Zero - Tolerance: Halogen < 50 ppm; measured according to BS EN 14582				Halogen Zero - No Halogen added in the Flux:	☐																																																														
Halogen Free																																																																													
☐																																																																													
Halogen Zero - No Halogen added in the Flux:																																																																													
☐																																																																													
Paste Conditioning	Remove paste from fridge: Before opening the package leave paste 2 hours at room temperature so that paste warms up. Do not open jar/cartridge while paste is cold to prevent condensation of moisture on the paste - this causes defects, e.g. solder balling etc. Do not heat the paste. Before use of paste jar: To obtain uniform, stable viscosity stir paste for 1 to 2 min, using a stainless steel or chemically resistive plastic spatula. For further information see Technical Information.																																																																												
Reflow	Temperature profile adjustment according IPC/JEDEC J-STD-020.																																																																												
Cleaning	After reflow flux residues may remain on the circuit and do not need to be washed. For cleaning of wet paste or if desired for cleaning of flux residues Zestron and Vigon cleaners can be used – see separate cleaning recommendations.																																																																												
Storage	Store the solder paste in tightly-sealed containers and avoid exposure to sunlight and high humidity. Max expiration date: please refer to the expiry date on the label of the packaged product. Storage conditions in the refrigerator at 2-10°C.																																																																												
Contact	www.heraeus-contactmaterials.com						Version	TDS_Solder Paste F680 Series_18.March 2015																																																																					

The descriptions and engineering data shown here have been compiled by Heraeus using commonly-accepted procedures, in conjunction with modern testing equipment, and have been compiled as according to the latest factual knowledge in our possession. The information was up-to date on the date this document was printed (latest versions can always be supplied upon request). Although the data is considered accurate, we cannot guarantee accuracy, the results obtained from its use, or any patent infringement resulting from its use (unless this is contractually and explicitly agreed in writing, in advance). The data is supplied on the condition that the user shall conduct tests to determine materials suitability for a particular application